

ETIMAT P6 1p C16



Műszaki adatok

Cikkszám	001900030
Leírás	ETIMAT P6 1p C16
Osztály	Kismegszakító
Funkció	Kismegszakítók
Zárlati megszakítóképesség (kA)	6
Kioldási karakterisztika	C
Névleges áram	16
Névleges feszültség (V)	240/415
Pólusok száma	1
Névleges frekvencia (Hz)	50/60
Szabványok	60898-1, 60947-2
Névleges keresztmetszet	1...25
Feszültség típusa	AC
Névleges lökőfeszültség állóság Uimp (kV)	6

[Online product page](#)


Egyéb dokumentáció

[Műszaki adatok katalógus](#)[3D modell](#)[Használati utasítás](#)[EU nyilatkozat](#)[Eplan fájl](#)


ETIM nemzetközi osztályozás

Besorolás	EC000042
Osztály	Miniature circuit breaker (MCB)
Release characteristic	C
Number of poles (total)	1
Number of protected poles	1
Rated current	16A
Rated voltage	240/415V
Rated insulation voltage U_i	500V
Rated impulse withstand voltage U_{imp}	6kV
Rated short-circuit breaking capacity I_{cn} according to EN 60898 at 230 V	6kA
Rated short-circuit breaking capacity I_{cn} according to EN 60898 at 400 V	6kA
Rated short-circuit breaking capacity I_{cu} according to IEC 60947-2 at 230 V	6kA
Rated short-circuit breaking capacity I_{cu} according to IEC 60947-2 at 400 V	6kA
Voltage type	AC
Frequency	50...60Hz
Current limiting class	3
Suitable for flush-mounted installation	1
Concurrently switching neutral conductor	1
Over voltage category	3
Pollution degree	2
Additional equipment possible	1
Width in number of modular spacings	1
Built-in depth	70mm
Degree of protection (IP)	IP20
Ambient temperature during operating	-40...70°C
Connectable conductor cross section multi-wired	1...25mm ²
Connectable conductor cross section solid-core	1...25mm ²


Olvadási energia jellemzői

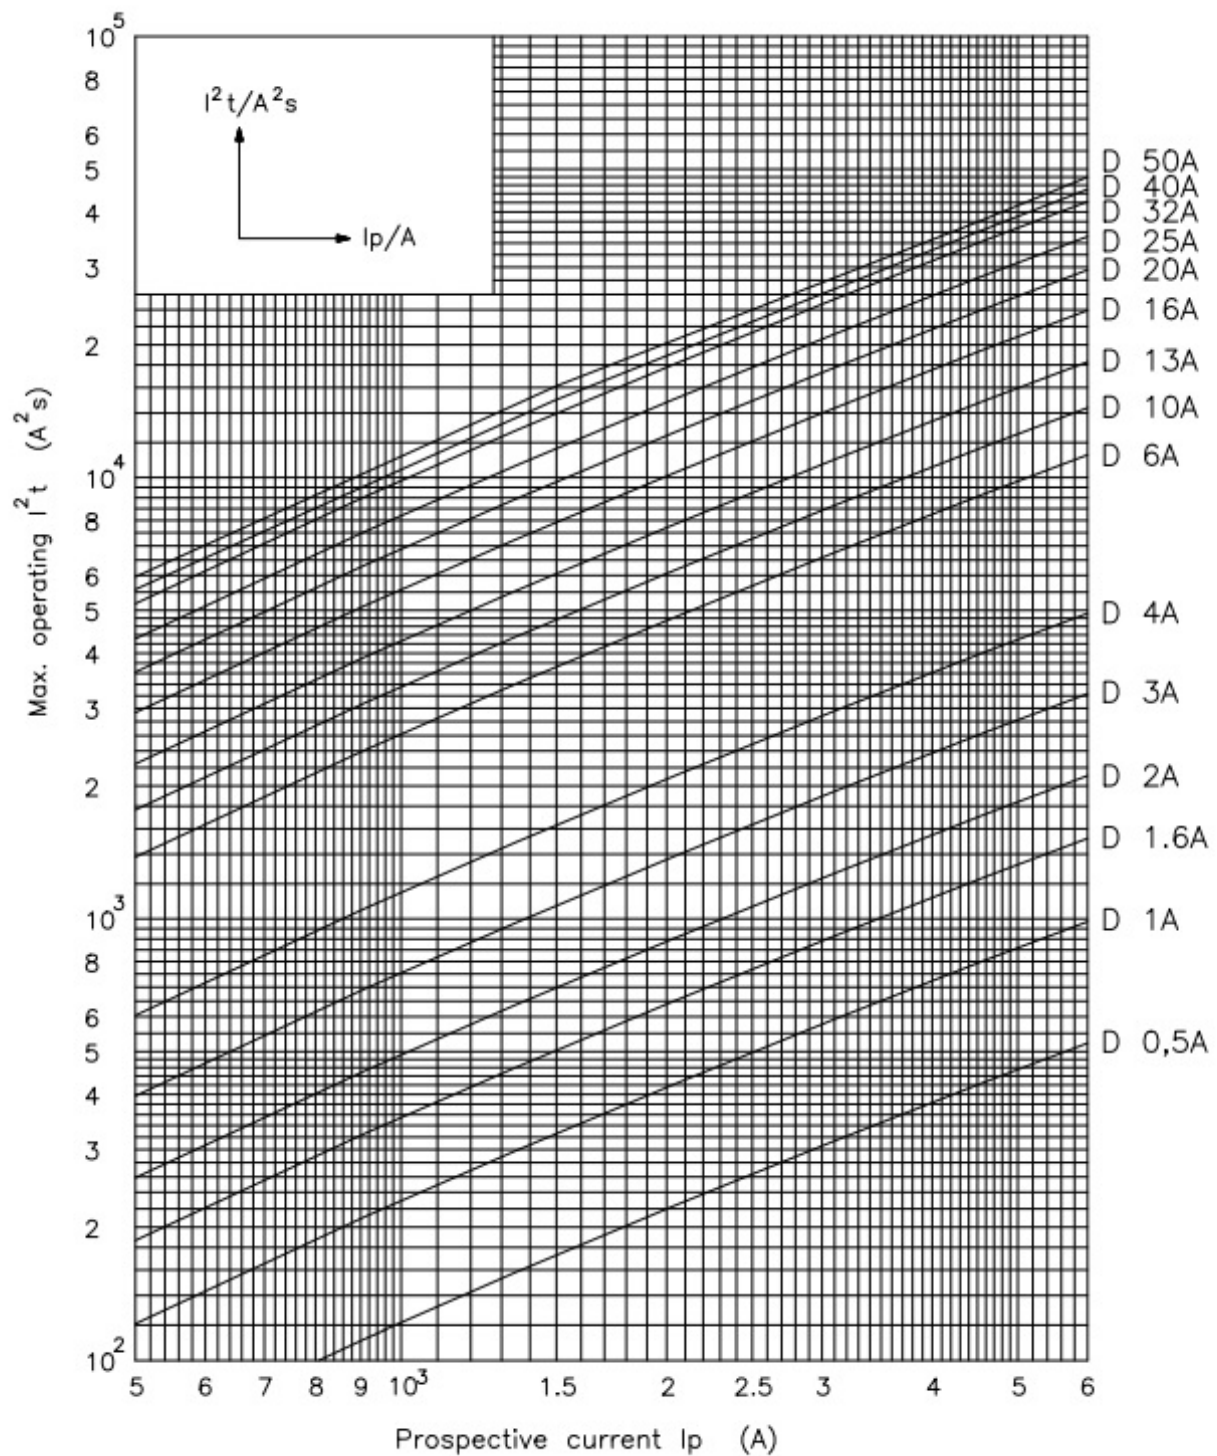

Jellemzők

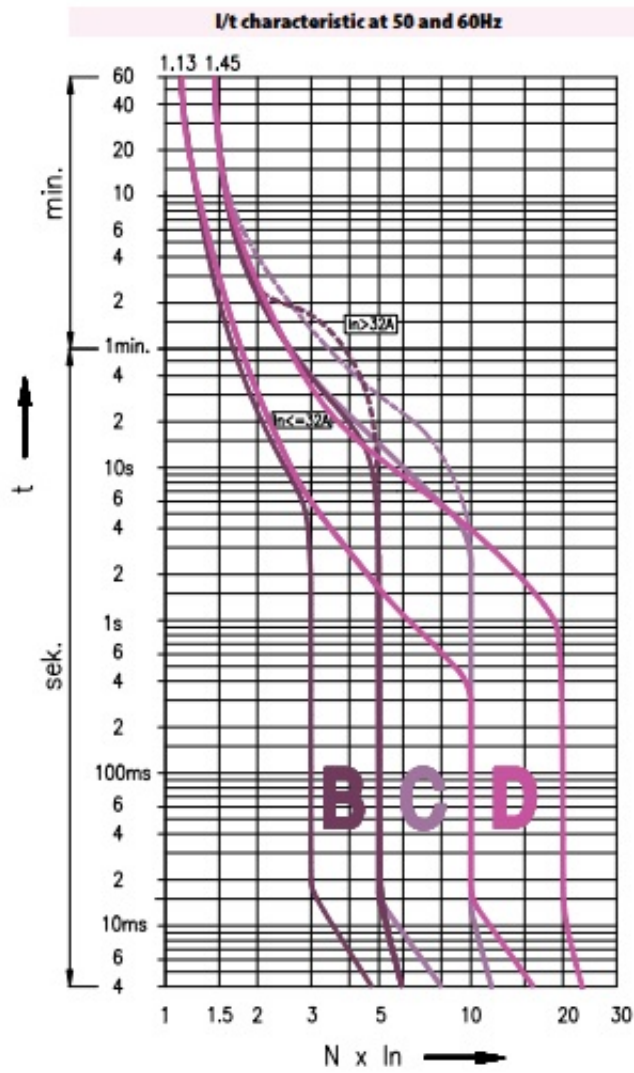

Méreterajz

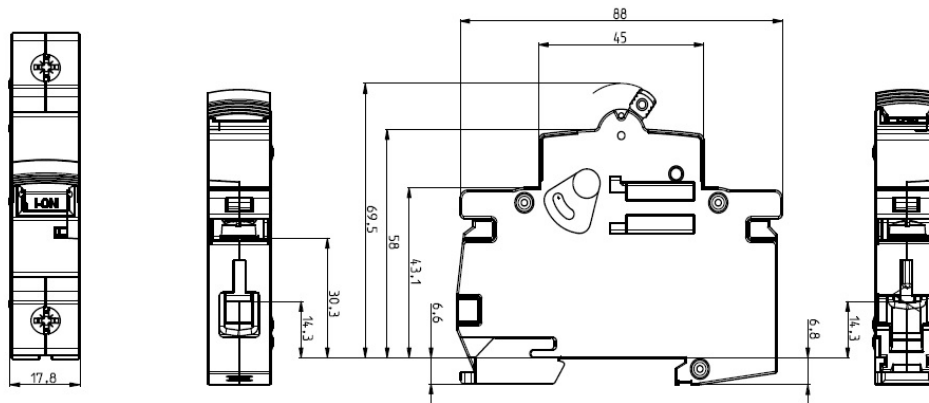

Szimbólum/Kapcsolat

1p




1p+n



2p



3p



3p+n

