

### Műanyag elosztószekrények, szerelőlapos / maszkkal egybeépítve




TRACON				H (mm)	W (mm)	D (mm)	×17,5mm Σs	X	NPE
				280	210	130	1 × 8	1	–
<b>TME282113*</b>	<b>TME282113T*</b>	<b>TME282113M</b>	<b>TME282113MT</b>	330	250	130	2 × 9	1	–
<b>TME332513*</b>	<b>TME332513T*</b>	<b>TME332513M</b>	<b>TME332513MT</b>	400	300	165	2 × 12	2	–
<b>TME403017*</b>	<b>TME403017T*</b>	<b>TME403017M</b>	<b>TME403017MT</b>	400	300	195	–	2	–
<b>TME403020*</b>	<b>TME403020T*</b>	–	–	500	400	175	3 × 17	2	–
<b>TME504018*</b>	<b>TME504018T*</b>	<b>TME504018M</b>	<b>TME504018MT</b>	600	400	200	4 × 17	2	–
<b>TME604020*</b>	<b>TME604020T*</b>	<b>TME604020M</b>	<b>TME604020MT</b>	700	500	245	4 × 22	2	–
<b>TME705025*</b>	<b>TME705025T*</b>	<b>TME705025M</b>	<b>TME705025MT</b>						



- Műanyag testű zár, fém betéttel, 180°-os elfordítással. Beépítésével a TME szekrény megtartja IP 65 védettségét.
- Kulcs kivitel: egységkulcs (nyitott és zárt állapotban is kivethető)

\* szerelőlappal

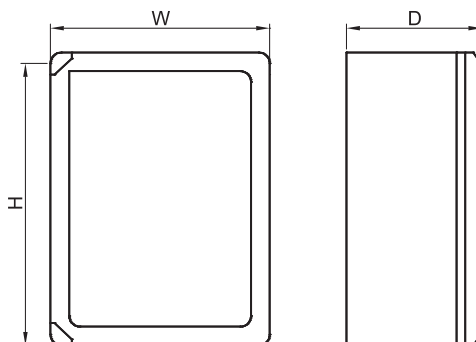

RELEVANT STANDARD  
EN 62208

