


**DATASHEET:**  
**D01 FUSE-LINKS**

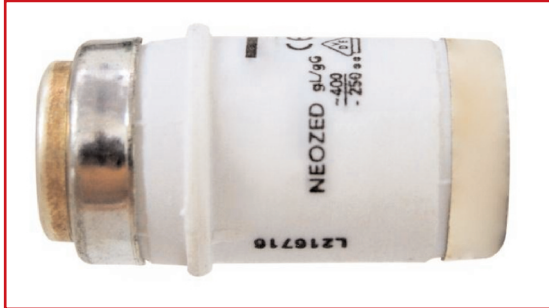


**SCHRACK INFO**

D01-fuse links in utilization categories gG according to IEC 60269, DIN EN 60269-1 and DIN VDE 0636-3 with rated voltage AC400V


**TECHNICAL DATA**

Rated current	2A	4A	6A	10A	16A
Color	pink	brown	green	red	grey
Utilization category	gG				
Rated voltage AC	400V				
Rated voltage DC	250V				
Size	D01				
Thread	E14				
Output	1,2W	1,3W	1,7W	1,4W	2,3W
Rated breaking capacity AC	50kA				
Rated breaking capacity DC	8kA				


**TIME CURRENT CHARACTERISTICS**

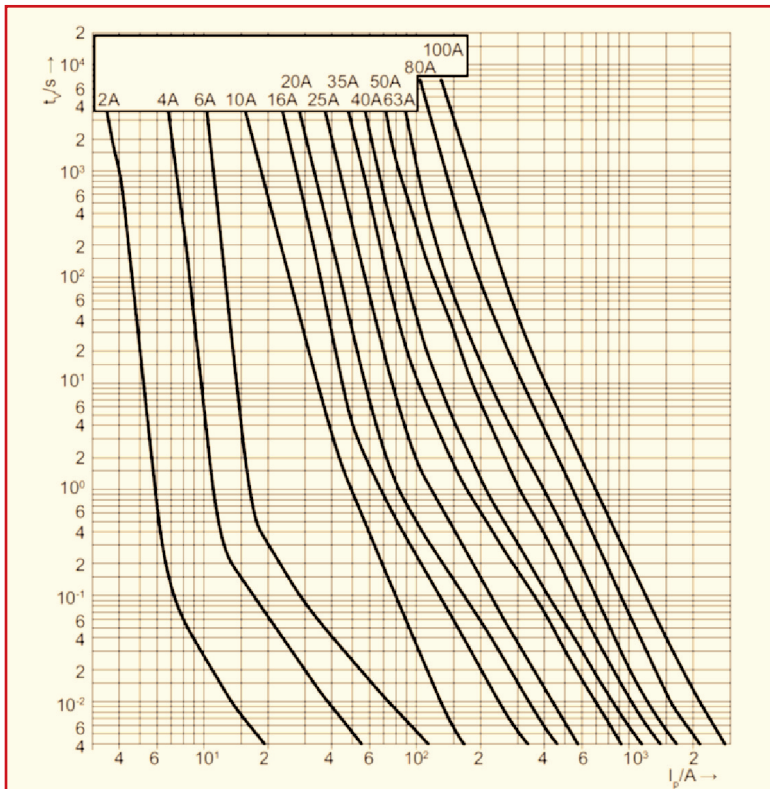

PEAK LET-THROUGH CURRENT CHART

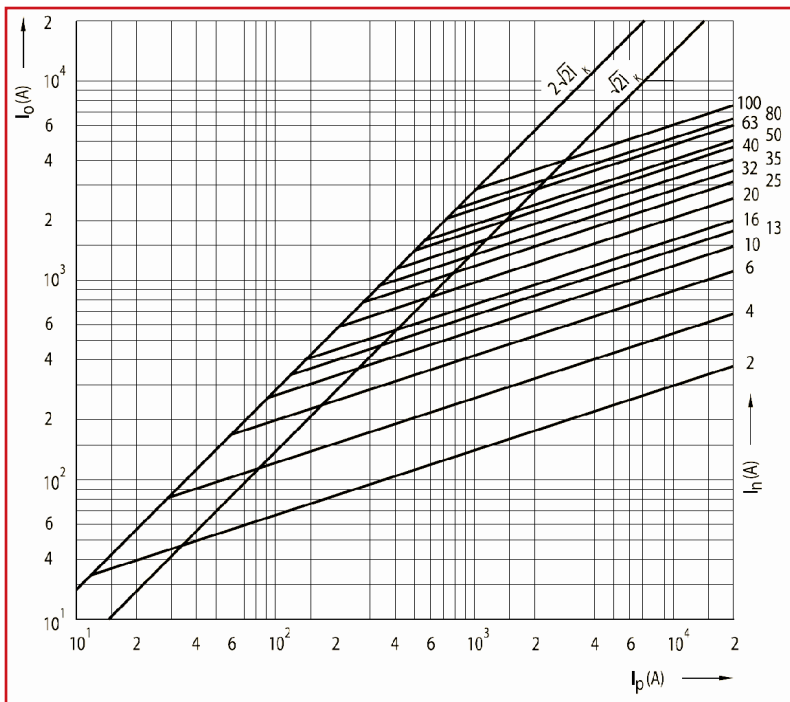

DIMENSIONS

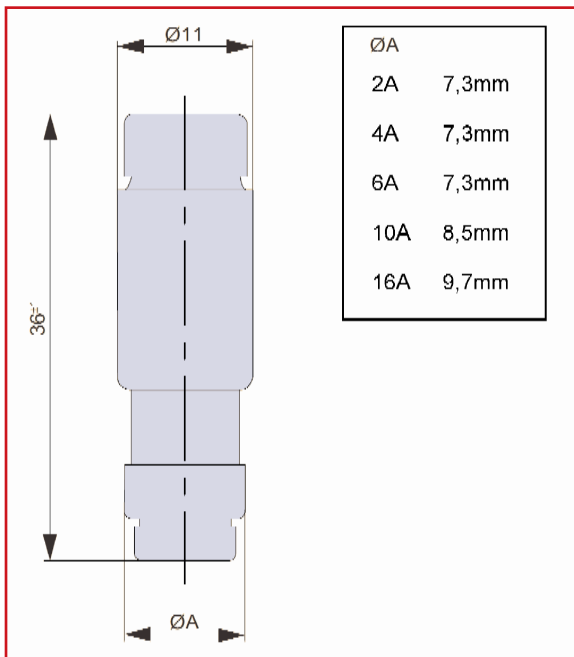

DESCRIPTION	EAN	ORDER NO.
Fuse 2A, Neozed D01, gL	9004840686302	IS504030
Fuse 4A, Neozed D01, gL	9004840686319	IS504031
Fuse 6A, Neozed D01, gL	9004840686326	IS504032
Fuse 10A, Neozed D01, gL	9004840686333	IS504033
Fuse 16A, Neozed D01, gL	9004840686340	IS504034