







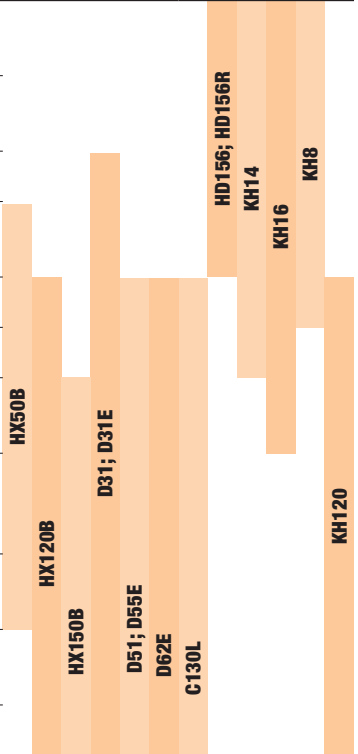


Szigetelőtlen szemes csőсарu

TRACON	d ₁ (mm)	d ₂ (mm)	D (mm)	L (mm)	B (mm)	mm ²													
																			
CL1.5-3	1.9	3.7	3.4	17	8														
CL1.5-4	1.9	4.3	3.4	17	8	1.5-2.5	1.5	1-1.5											
CL1.5-5	1.9	5.5	3.4	17	8.5														
CL2.5-4	2.4	4.3	3.9	18	8														
CL2.5-5	2.4	5.3	3.9	18	8	2.5-4	2.5	1.5											
CL2.5-6	2.4	6.4	3.9	19	10														
CL4-5	2.8	5.3	4.5	20.5	10														
CL4-6	2.8	6.4	4.5	20.5	10	4-6	4	2.5											
CL6-5	3.8	5.3	5.5	23	10														
CL6-6	3.8	6.4	5.5	23.5	10	10	6	4											
CL6-8	3.8	8.4	5.5	24.5	12.4														
CL10-6	4.4	6.5	6.1	24.5	10.2														
CL10-8	4.4	8.6	6.1	25.5	12.6	10-16	10	6											
CL16-6	5.4	6.4	7.1	30	10.2														
CL16-8	5.4	8.4	7.1	30	12.7	16	16	10											
CL25-6	6.8	6.4	8.8	30	12.6														
CL25-8	6.8	8.4	8.6	30	12.4	25-35	25	16											
CL25-10	6.8	10.5	8.8	31	15														
CL35-6	8.2	6.4	10.5	35	15.3														
CL35-8	8.2	8.4	10.5	35	15.3														
CL35-10	8.2	10.5	10.5	35	15.3	50	35	25											
CL35-12	8.2	13	10.5	36.5	18.6														
CL50-8	9.5	8.4	12.5	43	18														
CL50-10	9.5	10.5	12.5	43	18	70	50	35											
CL50-12	9.5	13	12.5	43	19														
CL70-8	11.2	8.4	14.5	50	23														
CL70-10	11.2	10.5	14.5	50	21	95	70	50											
CL70-12	11.2	13	14.5	50	21														
CL95-10	13.5	10.5	17.2	55	25														
CL95-12	13.5	13	17.2	55	25.5	120	95	70											
CL120-10	14.5	10.5	19.2	60	28														
CL120-12	14.5	13	19.2	60	28	150	120	70-95											
CL120-16	14.5	17	19.2	60	28														
CL150-12	16.5	13	20.8	69	30.5														
CL150-14	16.5	15	20.8	72	30.5	-	150	95											
CL150-16	16.5	17	20.8	75	31														
CL185-12	18	13	23.2	78	35														
CL185-14	18.5	15	23.2	78	35	-	185	120-150											
CL185-16	18	17	23.2	78	35														
CL240-14	21	15	26	90	38.3	-	240	150-185											
CL240-16	20.3	17	26	90	38.3														
CL300-16	23.5	17	30	100	43.5	-	300	185-240											
CL400-16	28.5	17	36.5	115	53	-	400	300											
CL400-20	28.5	21	36.5	115	53	-	400	300											
CL500-16	29.5	17	39	125	56	-	500	300											
CL625-16	34.5	17	44	130	62	-	625	400											



RELEVANT STANDARD
MSZ-05-45.1601-1

RELEVANT STANDARD
EN 61238-1

