


# DATA SHEET


## FIBERGLASS ROAD Ø 7,5 MM

incl. wheeled steel cage, double run-out system, metercounter


Item no.: 10076 | 10077 | 10078 | 10079 | 10080 | 10091



**BEGINNING:**   
Shackle, stainless steel with RUNPOTEC RTG Ø 12 mm thread - screwed to strand

**ENDING:**   
Ending joint, stainless steel with RUNPOTEC RTG Ø 12 mm thread

### Detailed images:

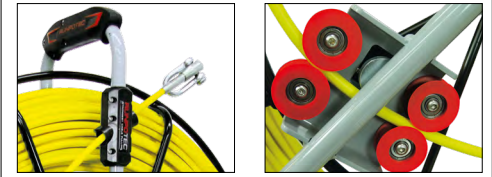


automatic run-out brake

Quick run with mounted rollers



Metercounter

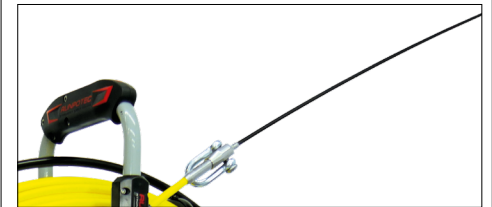

Adaptable leading heads





### DATA

| ITEM NO.            | 10076                          | 10077   | 10078   | 10079   | 10080   | 10091   |
|---------------------|--------------------------------|---------|---------|---------|---------|---------|
| LENGTH              | 40 m                           | 50 m    | 60 m    | 80 m    | 100 m   | 120 m   |
| TOTAL WEIGHT        | 9,6 kg                         | 10,2 kg | 10,9 kg | 12,2 kg | 13,5 kg | 14,8 kg |
| MATERIAL            | Fiberglass core with PP sheath |         |         |         |         |         |
| PIPE Ø              | for tube diameter 50 - 120 mm  |         |         |         |         |         |
| TOTAL BREAKING LOAD | 400 kg                         |         |         |         |         |         |

### ADVANTAGES

- ✓ incl. steel reel and metre counter
- ✓ Double run-out system (automatic run-out brake and fast run-out)
- ✓ Additional parking brake
- ✓ Glass fibre rod total breaking load up to 3400 kg
- ✓ Total service load 400 kg
- ✓ Bending radius 500 mm

### Rec. tube diameter, bending radius and total breaking load

|        |   |   |  |   |
|--------|---|---|--|---|
| Ø      |  |  |  |  |
| 7,5 mm | 50 - 120 mm   | 500 mm  | 3400 kg  | 400 kg  |

### DESCRIPTION

Cable puller glass fibre rod Ø 7.5 mm - RUNPOTEC RTG Ø 12 mm thread with robust steel reel (galvanised/powder coated) Ø 730 mm incl. new double run-out system (automatic run-out brake and fast run-out), additional parking brake. The shackle also has a transition thread to RTG Ø 6 mm to adapt various guide rods (RUNPOSTICKS), guide probes, cable pulling sleeves, multifunction camera RC 2 and the like. Fiberglass rod total breaking load 3400 kg, total breaking load 400 kg.

**Optimal field of application:** for pipe diameters 50 mm - 120 mm.

**Application film:** a short, very informative application film can be viewed by scanning the QR Code or on [www.runpotec.com](http://www.runpotec.com)

**Scope of delivery:** 1 piece of glass fibre rod Ø 7.5 mm with steel reel and new double run-out system, end sleeves on both sides (start/end), 1 x metre counter, 1 x shackle

### INFORMATION

#### Compatible with:

#### RUNPOCAM RC2

Length: 10 m | 30 m | 50 m  
Item no. 10139 | 10140 | 10141



Click here Productinformation